


Двухстворчатый обратный клапан

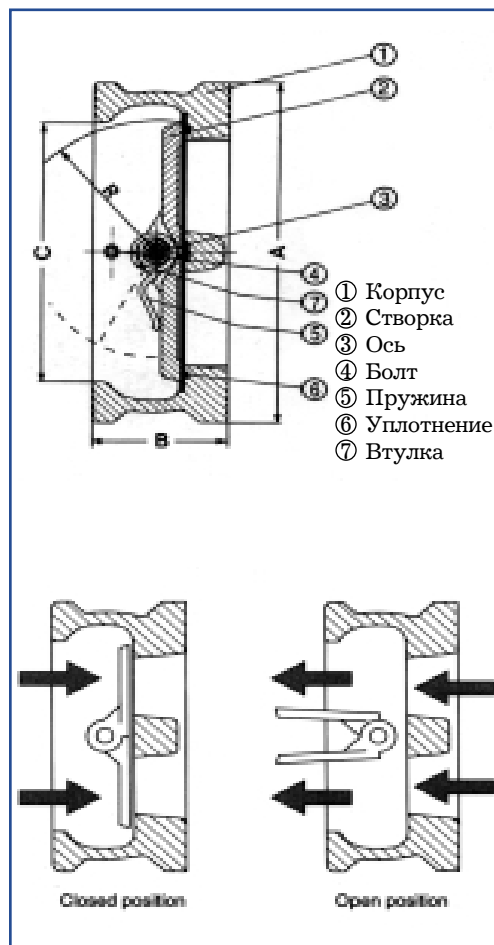

РАЗМЕРЫ		A	C	B	R	Вес, кг
мм	ДЮЙМЫ					
40	1 1/2"	78	55	44	25.5	1.2
50	2"	98	66	43	28.8	1.5
65	2 1/2"	110	80	45	35.1	2.4
80	3"	128	100	64	43.4	3.6
100	4"	160	112	64	52.5	5.7
125	5"	192	135	70	65.7	7.3
150	6"	218	160	76	78.5	9.0
200	8"	275	210	88	104.4	17
250	10"	334	260	114	127	26
300	12"	384	310	114	148.3	42
350	14"	438	360	127	172.4	55
400	16"	489	410	140	187.4	75
450	18"	538	450	152	217.8	101
500	20"	584	505	152	241	111
600	24"	680	624	178	295.4	172
700	28"	800	720	229	354	218
800	32"	930	625	241	403.8	314

№	Материал	СТАНДАРТЫ		
		JIS	ASTM	
1	ЧУГУН	FC20	A126classB	
	ВЫСОКОП. ЧУГУН	FCD45	A536	
2	БРОНЗА	FC6	B62	
	НЕРЖАВ. СТАЛЬ	SCS13	A351CF8	SST 304
	НЕРЖАВ. СТАЛЬ	SCS14	A351CF8M	SST 316
3	НЕРЖАВ. СТАЛЬ	SUS304	A182F304	
4	СТАЛЬ	SCM3		
5	НЕРЖАВ. СТАЛЬ	SUS304	A182F304	
6	РЕЗИНА BUNA-N		N.B.R	0-80 C (32-176 F)
	РЕЗИНА EPDM			(EPT) 0-120 C
7	ТЕФЛОН			

Kibbutz Dorot, Mobile Post Hof Ashkelon, Israel 79175
 Tel: +972-8-6808 848, Fax: +972-8-6808 751
 E-Mail: dorotexp@netvision.net.il, web: www.dorot.com

